




VERSIONE CON SENSORE A MICROONDE DI PRESENZA/CREPUSCOLARE
TWILIGHT/MOTION MICROWAVE SENSOR VERSION

LED A-A+ **IP54 CE**

Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
BET002	bianco white	3000K	1300 lm	≥ 80	17W - 220/240V	Ø305x84 mm		0,6 Kg
BET012	bianco white	4000K	1390 lm	≥ 80	17W - 220/240V	Ø305x84 mm		0,6 Kg
BET005	bianco white	3000K	2100 lm	≥ 80	28W - 220/240V	Ø400x96 mm		0,6 Kg
BET015	bianco white	4000K	2250 lm	≥ 80	28W - 220/240V	Ø400x96 mm		0,6 Kg

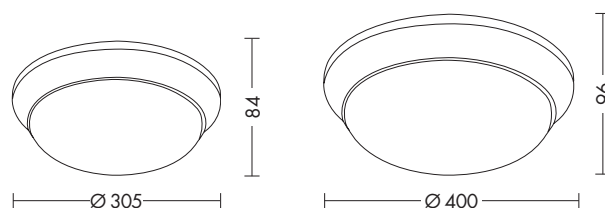

Impostazione del tempo del sensore
Sensor time set
10s - 12min



Informazioni sensore Sensor information



Altezza installazione
Height of installation



Campo di regolazione
distanza di rilevamento
Sensing distance adjustment range



Campo di regolazione
angolo di rilevamento
Sensing angle adjustment range



Potenza di trasmissione < 0,2 mW
Transmission power < 0,2 mW