




PARETE BIEMISSIONE DIRECT-INDIRECT LIGHT WALL

MADE IN MILANO LED UGR<19 A** ⊥ F IP40 CE

Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
NAS005B	bianco white	3000K	5330+2665 lm	≥ 80	36W+18W-220/240V	1080x65x75 mm		3,0 Kg
NAS006B	bianco white	4000K	5584+2792 lm	≥ 80	36W+18W-220/240V	1080x65x75 mm		3,0 Kg
NAS005GR	grigio grey	3000K	5330+2665 lm	≥ 80	36W+18W-220/240V	1080x65x75 mm		3,0 Kg
NAS006GR	grigio grey	4000K	5584+2792 lm	≥ 80	36W+18W-220/240V	1080x65x75 mm		3,0 Kg
NAS007B	bianco white	3000K	7995+5330 lm	≥ 80	54W+36W-220/240V	1620x65x75 mm		4,5 Kg
NAS008B	bianco white	4000K	8376+5584 lm	≥ 80	54W+36W-220/240V	1620x65x75 mm		4,5 Kg
NAS007GR	grigio grey	3000K	7995+5330 lm	≥ 80	54W+36W-220/240V	1620x65x75 mm		4,5 Kg
NAS008GR	grigio grey	4000K	8376+5584 lm	≥ 80	54W+36W-220/240V	1620x65x75 mm		4,5 Kg

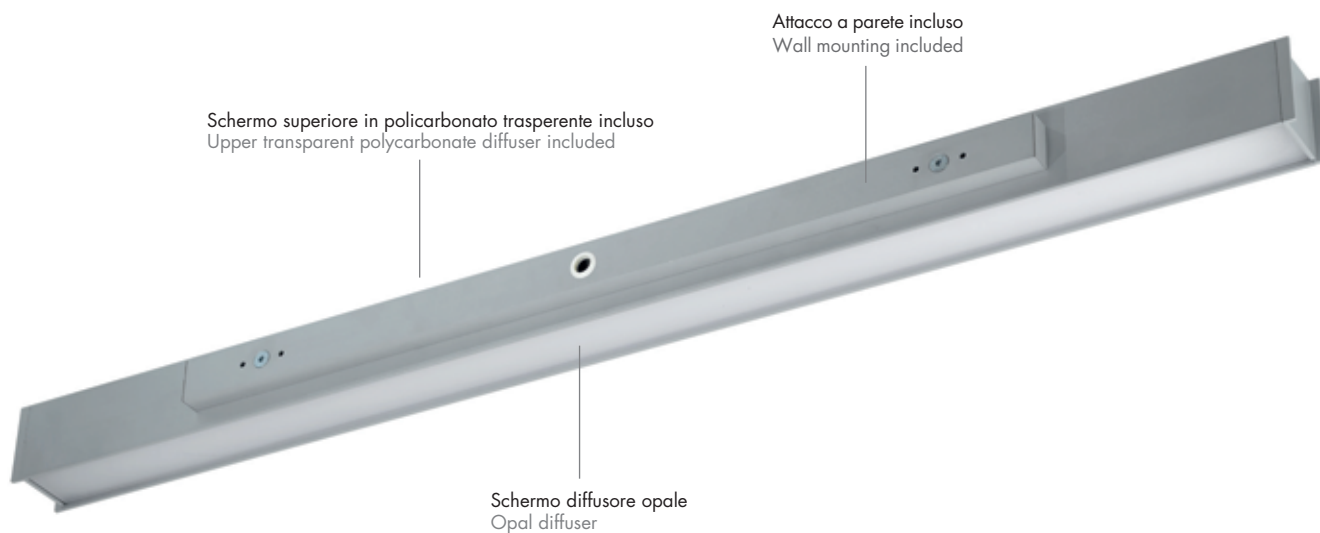


diffusore opale
opal diffuser



ottica antiriflesso
antireflection optic

UGR
<19

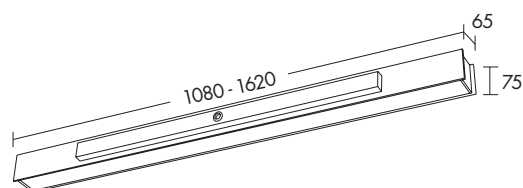

testate di chiusura terminali, schermo, giunti da ordinare separatamente end caps, diffuser, fixing kit and joints to be ordered separately