




MADE IN MILANO **LED** UGR<19 A** 220V A* 120° IP20 CE

Codice Code	Finitura Finishing	K/°	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
POU001B	bianco white	3000K	5828+2914 lm	≥ 80	40W+20W - 220/240V	1180x250x40 mm		4,0 Kg
POU001GR	grigio grey	3000K	5828+2914 lm	≥ 80	40W+20W - 220/240V	1180x250x40 mm		4,0 Kg
POU002B	bianco white	4000K	6104+3052 lm	≥ 80	40W+20W - 220/240V	1180x250x40 mm		4,0 Kg
POU002GR	grigio grey	4000K	6104+3052 lm	≥ 80	40W+20W - 220/240V	1180x250x40 mm		4,0 Kg
10209-54-B	bianco white	G5	–	–	2x54 W - 220V	1230x250x40 mm		3,8 Kg
10209-54-GR	grigio grey	G5	–	–	2x54 W - 220V	1230x250x40 mm		3,8 Kg
10209-80-B	bianco white	G5	–	–	2x80 W - 220V	1530x250x40 mm		4,4 Kg
10209-80-GR	grigio grey	G5	–	–	2x80 W - 220V	1530x250x40 mm		4,4 Kg

schermo diffusore microprismato
microprismatic diffuser

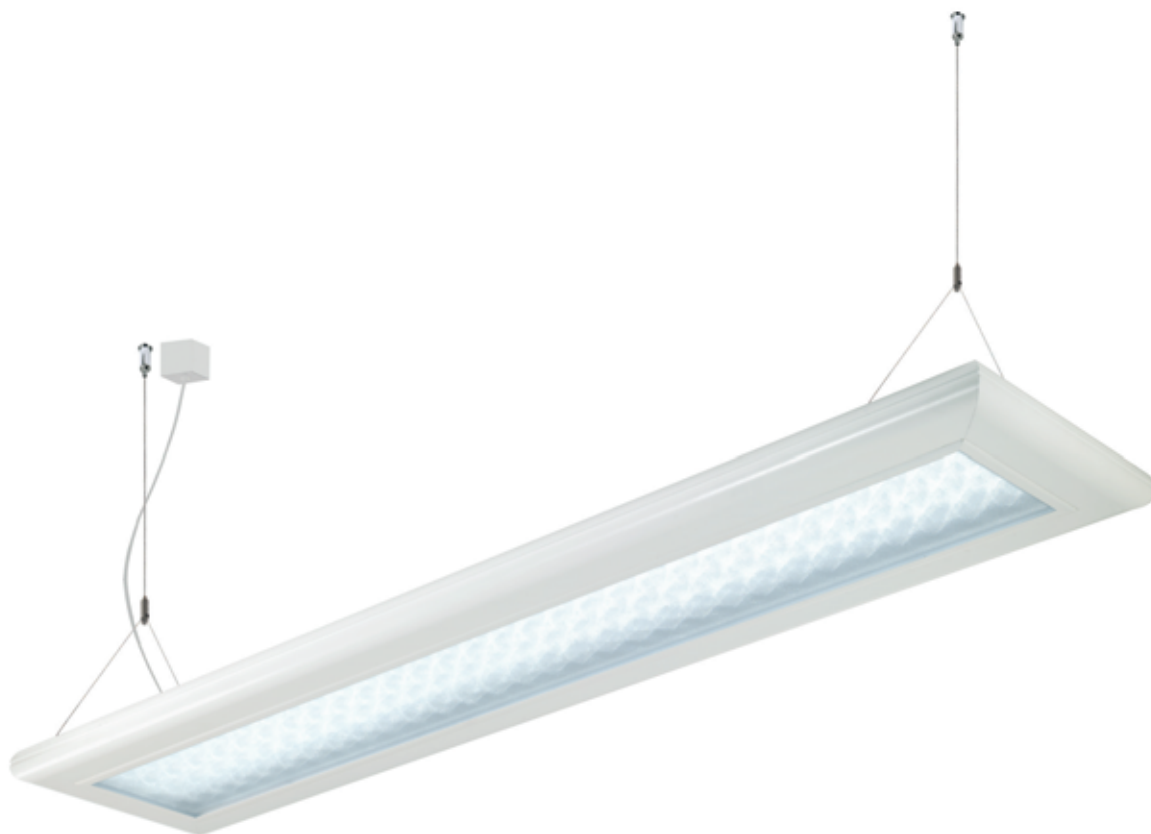

bianco white

UGR
<19

ottica antiriflesso in alluminio
aluminium antireflection optic



grigio grey

