


MONOFASE
MONOPHASE

 MONOFASE
MONOPHASE


LED A+ IP20 CE

Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
LAU001B	bianco white	3000K	880 lm	≥ 90	10W - 220/240V	Ø60x165x200 mm		0,5 Kg
LAU002B	bianco white	4000K	920 lm	≥ 90	10W - 220/240V	Ø60x165x200 mm		0,5 Kg
LAU001GR	grigio grey	3000K	880 lm	≥ 90	10W - 220/240V	Ø60x165x200 mm	*	0,5 Kg
LAU002GR	grigio grey	4000K	920 lm	≥ 90	10W - 220/240V	Ø60x165x200 mm		0,5 Kg
LAU001N	nero black	3000K	880 lm	≥ 90	10W - 220/240V	Ø60x165x200 mm		0,5 Kg
LAU002N	nero black	4000K	920 lm	≥ 90	10W - 220/240V	Ø60x165x200 mm		0,5 Kg

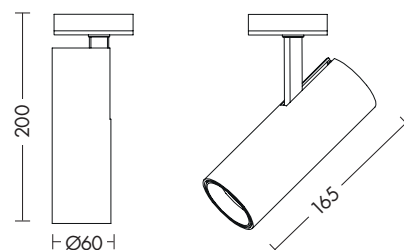

* Disponibili ottiche intercambiabili MAA112OT, MAA124OT per cambio apertura fascio rispettivamente a 12° e 24°.

Available interchangeable optics MAA112OT, MAA124OT to change light beam respectively at 12° e 24°.