




LED **IP20 CE**

Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
LAU003B	bianco white	3000K	1750 lm	≥ 90	20W - 220/240V	Ø70x210x245 mm		0,7 Kg
LAU004B	bianco white	4000K	1840 lm	≥ 90	20W - 220/240V	Ø70x210x245 mm		0,7 Kg
LAU003GR	grigio grey	3000K	1750 lm	≥ 90	20W - 220/240V	Ø70x210x245 mm	*	0,7 Kg
LAU004GR	grigio grey	4000K	1840 lm	≥ 90	20W - 220/240V	Ø70x210x245 mm		0,7 Kg
LAU003N	nero black	3000K	1750 lm	≥ 90	20W - 220/240V	Ø70x210x245 mm		0,7 Kg
LAU004N	nero black	4000K	1840 lm	≥ 90	20W - 220/240V	Ø70x210x245 mm		0,7 Kg

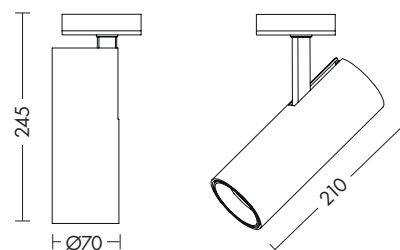

* Disponibili ottiche intercambiabili MAA212OT, MAA224OT e MAA260OT per cambio apertura fascio rispettivamente a 12°, 24° e 60°.

Available interchangeable optics MAA212OT, MAA224OT e MAA260OT to change light beam respectively at 12°, 24° and 60°.