








MADE IN MILANO **LED** **A** **IP20** **CE**

Codice Code	Finitura Finishing	K	Flusso Flux	CRI	Potenza Wattage	Dimensioni Dimension	Ottica Optics	Peso Weight
MONOEMISSIONE DIRECT LIGHT								
CAB111B	bianco white	3000K	3420 lm	≥ 80	25W - 220/240V	632x322x46 mm		3,2 Kg
CAB112B	bianco white	4000K	3600 lm	≥ 80	25W - 220/240V	632x322x46 mm		3,2 Kg
CAB111GR	grigio grey	3000K	3420 lm	≥ 80	25W - 220/240V	632x322x46 mm		3,2 Kg
CAB112GR	grigio grey	4000K	3600 lm	≥ 80	25W - 220/240V	632x322x46 mm		3,2 Kg
BIEMISSIONE DIRECT-INDIRECT LIGHT								
CAB115B	bianco white	3000K	5700 lm	≥ 80	25W+16W-220/240V	632x322x46 mm		3,4 Kg
CAB116B	bianco white	4000K	6000 lm	≥ 80	25W+16W-220/240V	632x322x46 mm		3,4 Kg
CAB115GR	grigio grey	3000K	5700 lm	≥ 80	25W+16W-220/240V	632x322x46 mm		3,4 Kg
CAB116GR	grigio grey	4000K	6000 lm	≥ 80	25W+16W-220/240V	632x322x46 mm		3,4 Kg

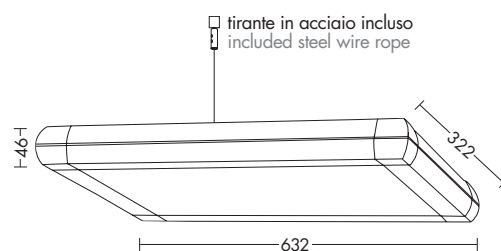

Info tecniche Technical info



Esclusivo sistema di aggancio rapido senza l'ausilio di utensili.
Exclusive fixing system for a quick tool-free installation.